




SR6-12

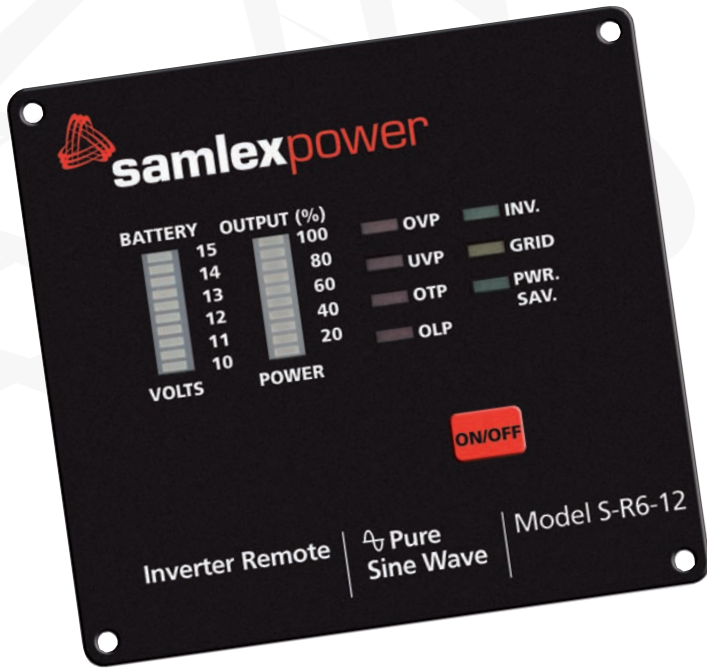

Inverter Remote Control Pure Sine Wave

Model
S-R6-12

Design Features

- Designed for use with the following Samlex Pure Sine Wave Inverters:
 - SA-1000K-112
 - SA-2000K-112
 - SA-3000K-112
- Reverse override function
- 25 feet of wire included
- Bar Meter Monitor for battery voltage and output power
- LED indicator for:
 - Over voltage protection
 - Under voltage protection
 - Over temperature protection
 - Over load protection
 - Power save mode

2 YEAR WARRANTY

MODEL NO.	S-R6-12
INPUT VOLTAGE	Separate versions for 12 V & 24 V inverters
OPERATING TEMPERATURE RANGE	0 - 40°C
STORAGE TEMPERATURE RANGE	- 30°C to + 70°C
STAND-BY CURRENT DRAW	< 80 mA
DIMENSIONS, INCHES (L x W)	4.7 x 5.1
DIMENSIONS, MM (L x W)	120 x 130
APPLICABLE MODELS	SA-1000K, 2000K, 3000K Series

NOTE: Specifications are subject to change without notice